



Optional Framing


* Cometal requires that exact opening dimensions be provided. Factory will fabricate mats 6 mm [1/4"] smaller than exact opening dimensions to allow for proper fit.

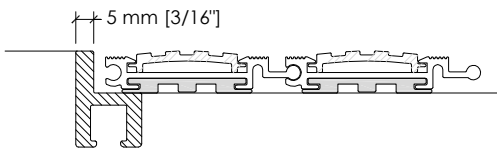

Recessed frame MRF-1002



Recessed frame SSF-125



Surface frame BSF-225

Features

- Extruded aluminum treads alloy 6063-T52
- Continuous vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Optional perforated hinge for added drainage
- Single section width to 3658 mm [144"]
- Static coefficient of Friction (ASTM D-2047-82)
Dry : 0.61, Wet : 0.92

Finishes

Aluminum tread and spacer :


- Mill finish (standard) #405
- Medium bronze anodized #404
- Clear anodized #403
- Black anodized #462

Vinyl cushion : Black


Corrugated aluminum insert alloy 6105-T5:

Mill finish (standard) #405

Hinge Details



Ball & Socket Hinge

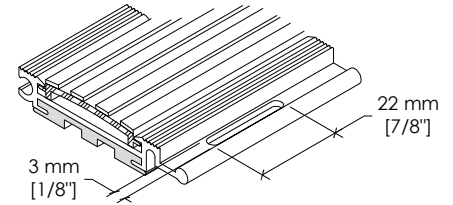

Optional perforated hinge (solid hinge standard)

Optional nosings




Square vinyl nosing



Beveled vinyl nosing

Sectioning information

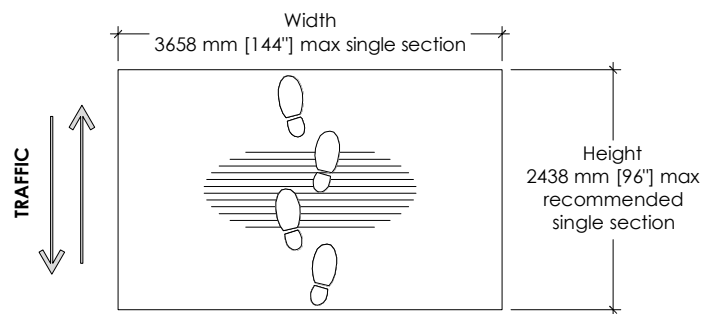

*Mats over 48 square feet require sectioning as determined by the factory

Project

Name : _____

Arch./Eng.: _____

Contractor : _____

OF # / Contract # : _____

Date : _____