

### Specifications

|                 |                            |
|-----------------|----------------------------|
| <b>Material</b> | Aluminum 6063-T5           |
| <b>Blades</b>   | Thickness 2.06 mm (0,081") |
| <b>L frame</b>  | Thickness 2,50 mm (0,098") |
| <b>U frame</b>  | Thickness 2,50 mm (0,098") |

### Available frames


- ☐ "L" frame
- ☐ "U" frame
- ☐ Concealed mullion (not available)
- ☐ Exposed mullions(nested frames)

### Available finish

- ☐ Mill
- ☐ Anodized clear 10 microns
- ☐ Anodized clear 18 microns
- ☐ Anodized light bronze
- ☐ Anodized architectural bronze
- ☐ Anodized champagne
- ☐ Anodized black
- ☐ Acrylic polyurethane coating\*
- ☐ Liquid super durable coating \*
- ☐ Duranar baked enamel\*
- ☐ Duranar XL baked enamel\*
- ☐ Powder coating\*

Color : \_\_\_\_\_

\* Painted on surfaces visible from the outside only

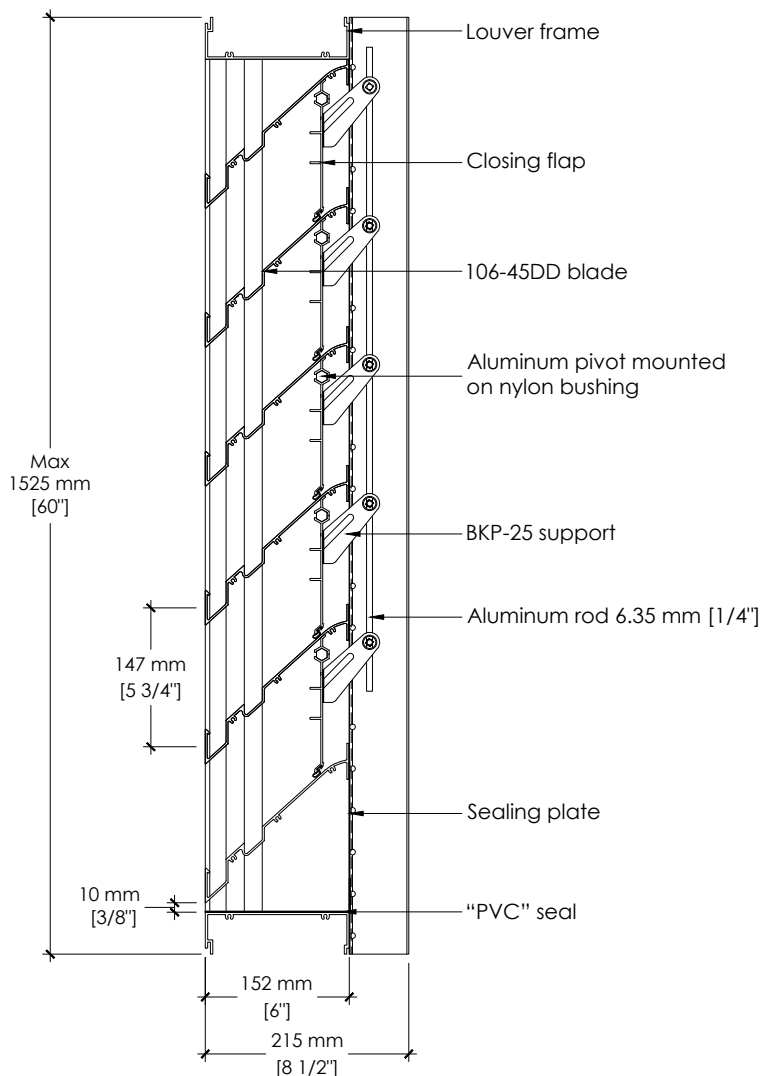

### Birdscreens and accessories

- ☐ Galvanized steel (standard)
- ☐ Expanded aluminum
- ☐ Woven aluminum
- ☐ Stainless steel
- ☐ Aluminum mosquito net
- ☐ Fiberglass mosquito net
- ☐ Permanent filter
- ☐ Birdscreen frame
- ☐ Others : \_\_\_\_\_

### Project

Name : \_\_\_\_\_


Arch./Eng.: \_\_\_\_\_

Contractor : \_\_\_\_\_


# OF / # PO : \_\_\_\_\_

Date : \_\_\_\_\_

#### Elevation (outside view)

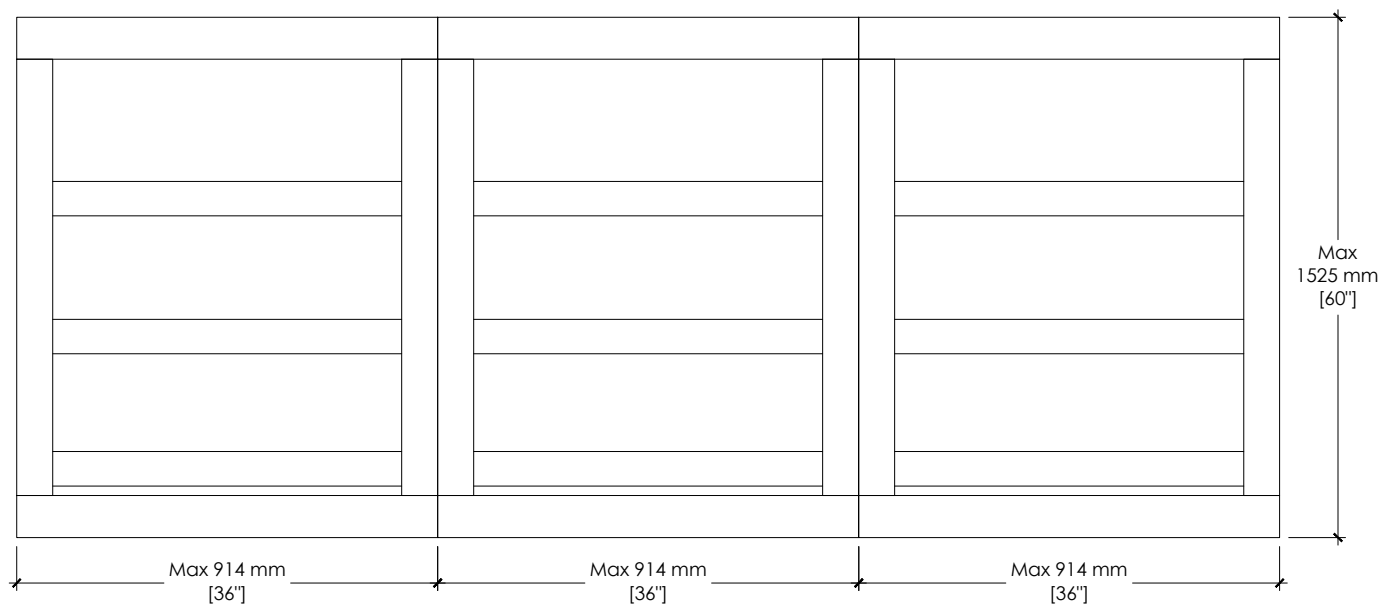

#### Section

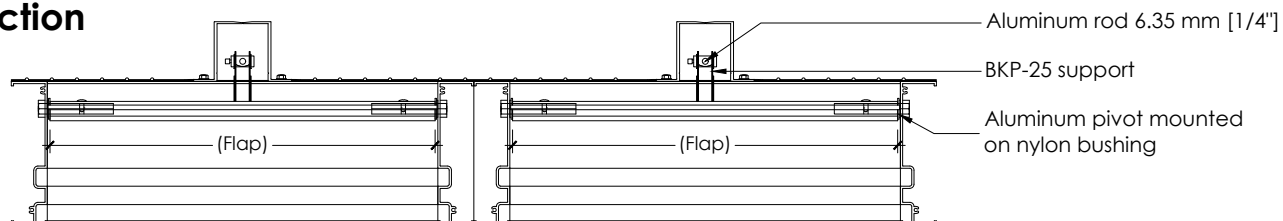

#### Activation system

