

Available frames

- ☐ "L" frame
- ☐ "U" frame
- ☐ Concealed mullion (continuous blades)
- ☐ Exposed mullions (nested frames)

Available models




- ☐ 101-45
- ☐ 102-45
- ☐ 104-30
- ☐ 104-45
- ☐ 106-45
- ☐ 202-45
- ☐ 204-30
- ☐ 204-37
- ☐ 204-45
- ☐ 206-45

Available finish

- ☐ **304 #4 Stainless steel**
16 gauge blade (1.587 mm)
14 gauge frame (1.984 mm)
- ☐ **316 #4 Stainless steel**
16 gauge blade (1.587 mm)
14 gauge frame (1.984 mm)
- ☐ **Copper**
20 oz blade (0.69 mm)
48 oz frame (1.6 mm)

Birdscreens and accessories

- ☐ Galvanized steel (standard)
- ☐ Expanded aluminum
- ☐ Woven aluminum
- ☐ Stainless steel
- ☐ Aluminum mosquito net
- ☐ Fiberglass mosquito net
- ☐ Permanent filter
- ☐ Birdscreen frame
- ☐ Others : _____

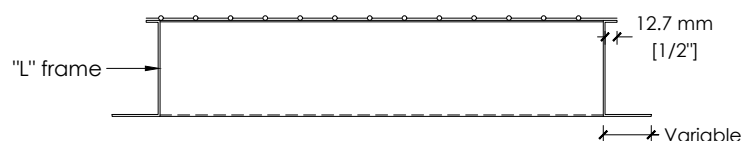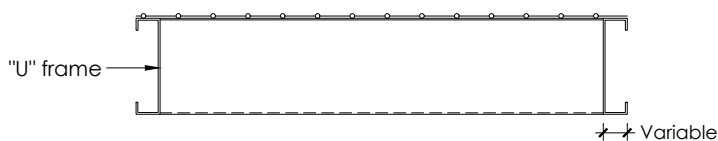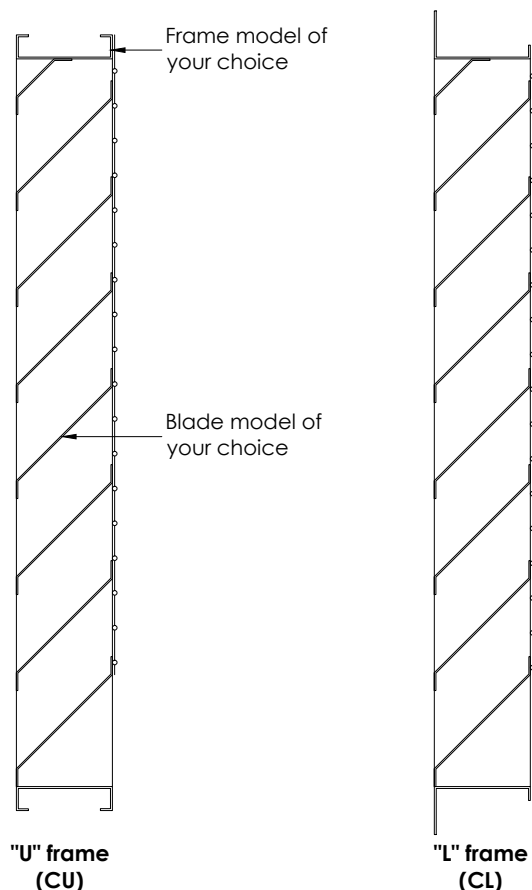

Project

Name : _____

Arch./Eng.: _____


Contractor : _____

OF / # PO : _____


Date : _____

Elevation

(outside view)

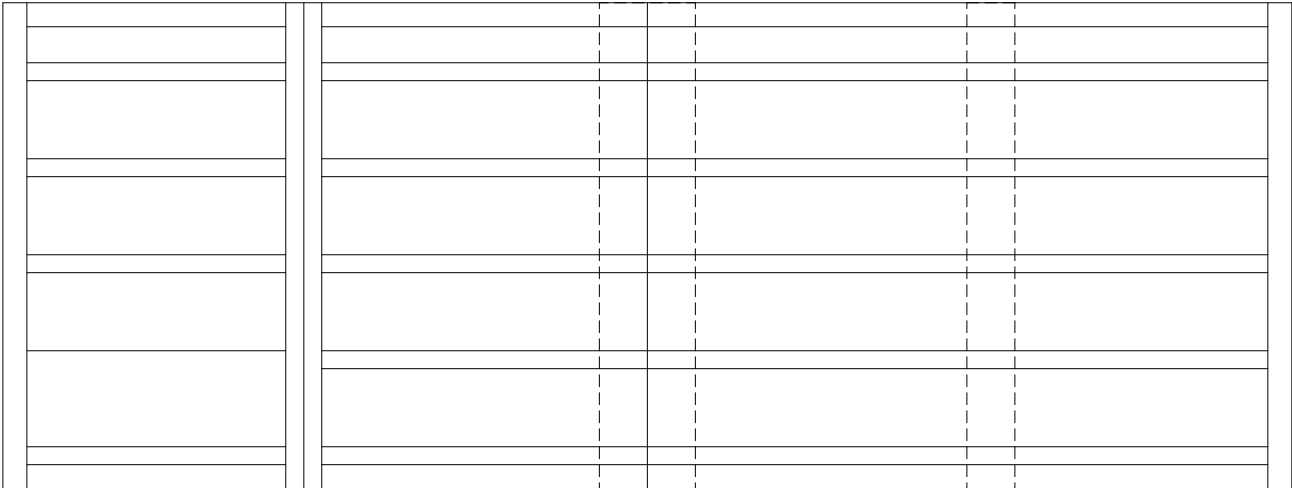


Section


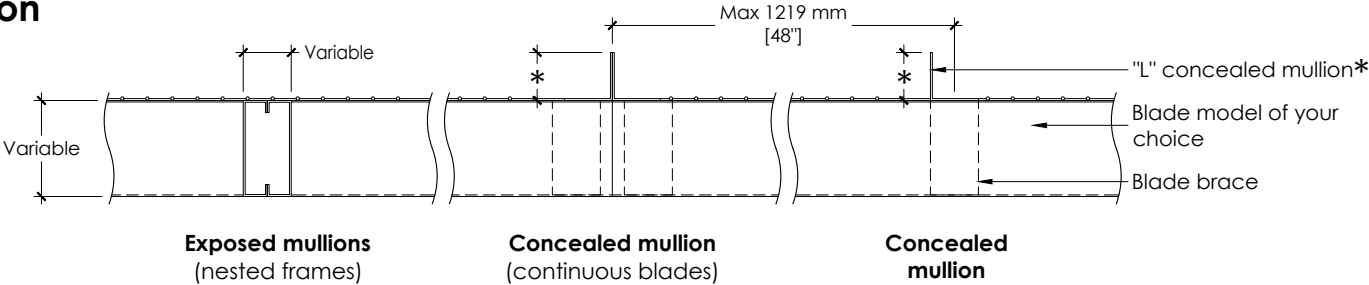


louver concealed mullion



For louvers more than 1220 mm (48") wide, a supporting structure is needed behind the louver

		*Louver concealed mullion dimension
Louver height	Less than 2438 mm (96")	38 x 38 x 4,7 mm angle (1 ½" x 1 ½" x 3⁄16")
	from 2438 mm (96") to 3658 mm (144")	51 x 51 x 4,7 mm angle (2" x 2" x 3⁄16")
	more than 3658 mm (144")	Please see the engineering departement

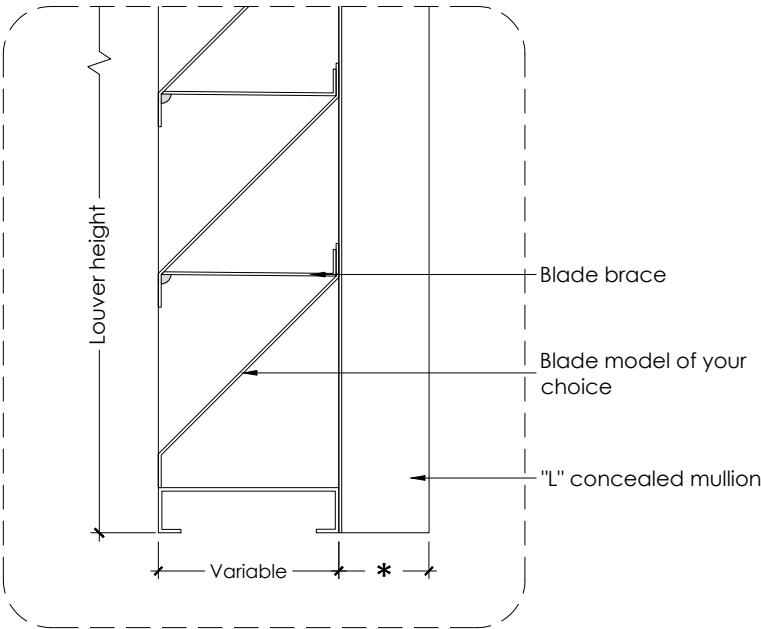

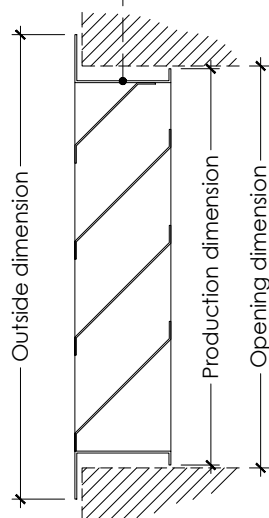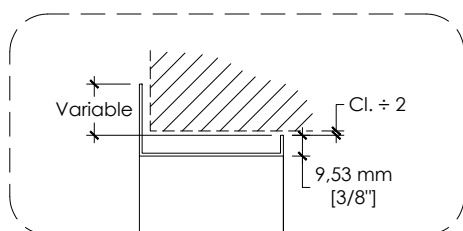

"L" frame (CL)

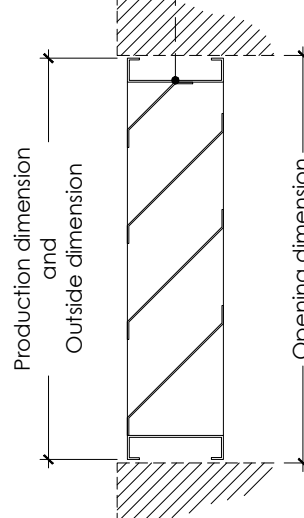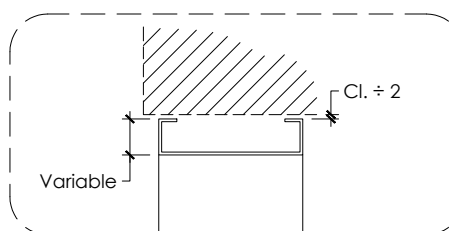

"U" frame (CU)

☐ Outside dimensions

☐ Opening dimensions

☐ Production dimensions

Item	Qty	Dimensions		Number of sections		Clearance (6 mm (1/4") minimum recommended)	Notes
		Width "A"	Height "B"	wide	High		