

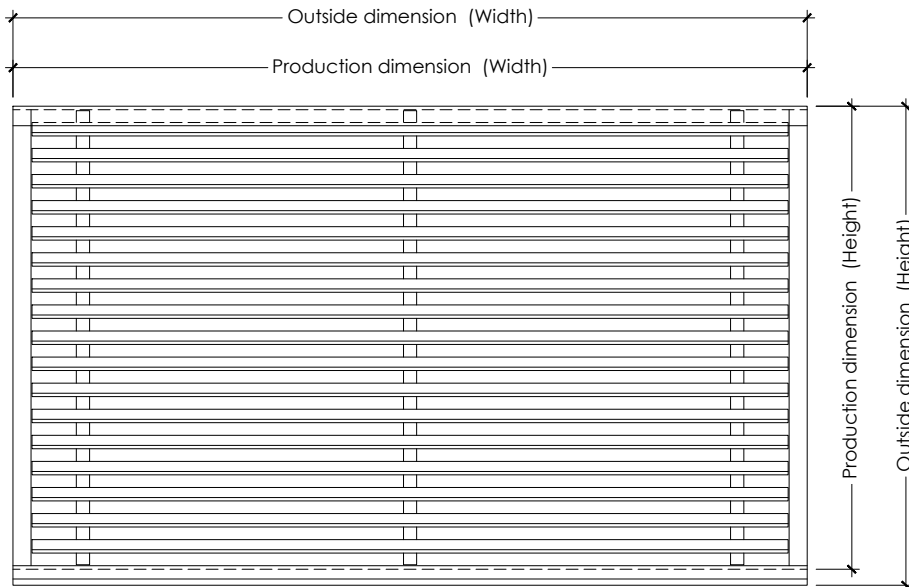


| Standard specifications |                    |
|-------------------------|--------------------|
| Blade material          | Aluminum 6061-T6   |
| Frame material          | Aluminum 6063-T5   |
| Tube material           | Aluminum 6063-T831 |
| Depth                   | 101,6 mm (4")      |
| Blade thickness         | 2,00 mm (0,078")   |
| Frame thickness         | 1,90 mm (0,075")   |
| Tube diameter           | 9,53 mm (0,375")   |
| Space between blades    | 9,96 mm (0,392")   |
| Blade spacing           | 13,80 mm (0,543")  |
| Finish                  | Mill finish        |
| Percentage of free area | 65,84 %            |
| Approximate weight      | 4,06 lbs/sq.ft.    |

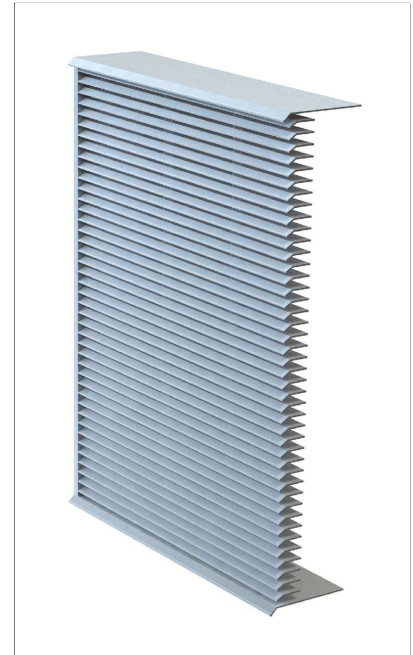


**Elevation**

(Outside view)

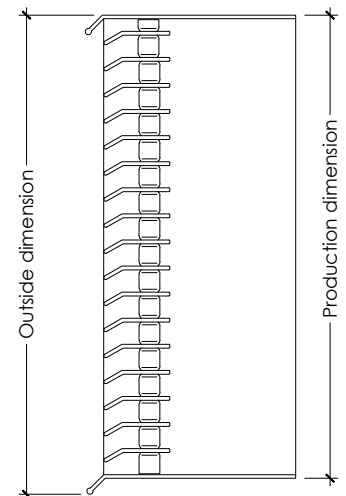

**Side section**

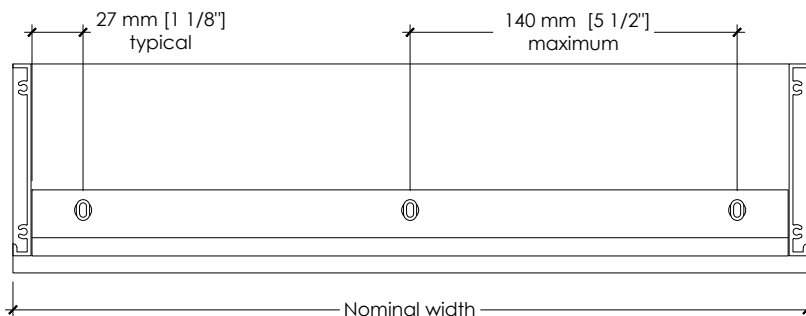

**Top section**

☐ Outside dimensions

☐ Opening dimensions

☐ Production dimensions

| Item | Qty | Dimensions |            | Number of sections |      | Clearance<br>(6 mm (1/4")<br>minimum<br>recommended) | Notes |
|------|-----|------------|------------|--------------------|------|------------------------------------------------------|-------|
|      |     | Width "A"  | Height "B" | Wide               | High |                                                      |       |
|      |     |            |            |                    |      |                                                      |       |
|      |     |            |            |                    |      |                                                      |       |
|      |     |            |            |                    |      |                                                      |       |
|      |     |            |            |                    |      |                                                      |       |
|      |     |            |            |                    |      |                                                      |       |
|      |     |            |            |                    |      |                                                      |       |
|      |     |            |            |                    |      |                                                      |       |

### Available finish


- ☐ Mill
- ☐ Anodized clear 10 microns
- ☐ Anodized clear 18 microns
- ☐ Anodized light bronze
- ☐ Anodized architectural bronze
- ☐ Anodized champagne
- ☐ Anodized black
- ☐ Acrylic polyurethane coating\*
- ☐ Liquid super durable coating\*
- ☐ Duranar baked enamel\*
- ☐ Duranar XL baked enamel\*
- ☐ Powder coating\*

Color : \_\_\_\_\_

\* Painted on surfaces visible from the outside only

### Birdscreens and accessories

- ☐ Galvanized steel (standard)
- ☐ Expanded aluminum
- ☐ Woven aluminum
- ☐ Stainless steel
- ☐ Aluminum mosquito net
- ☐ Fiberglass mosquito net
- ☐ Permanent filter
- ☐ Auxiliary frame (option)
- ☐ Others : \_\_\_\_\_

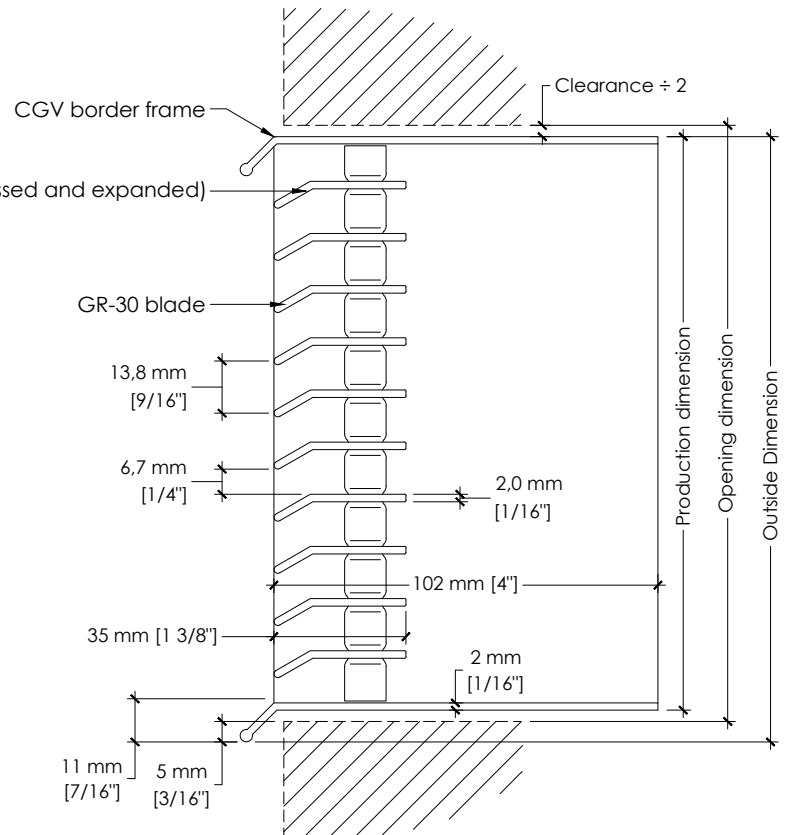

### Project

Name : \_\_\_\_\_

Arch./Eng.: \_\_\_\_\_

Contractor : \_\_\_\_\_

# OF / # PO : \_\_\_\_\_

Date : \_\_\_\_\_