

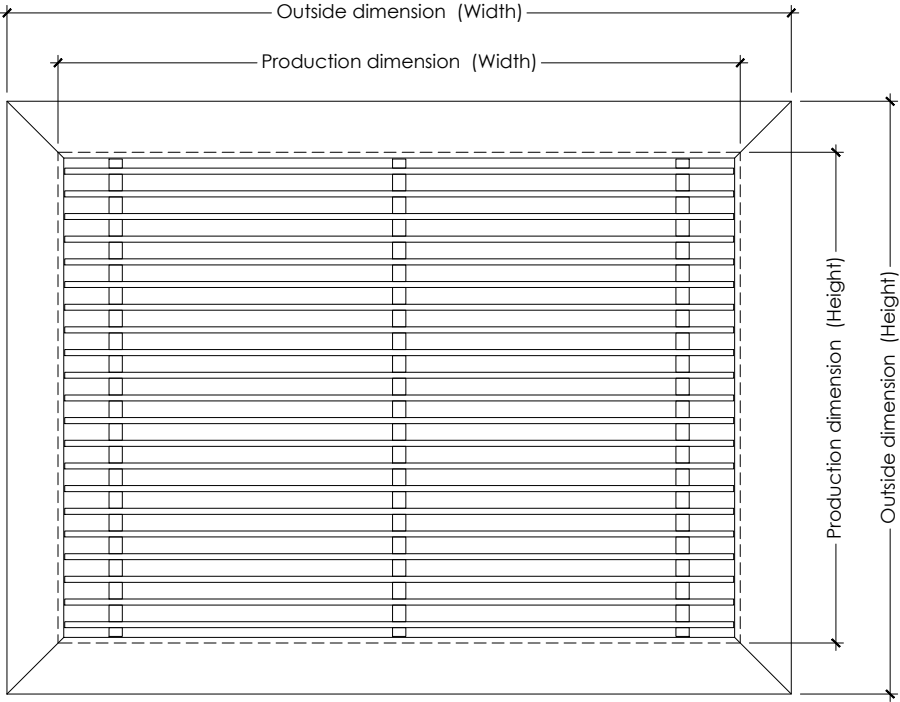



Standard specifications	
Blade material	Aluminum 6061-T6
Frame material	Aluminum 6063-T5
Tube material	Aluminum 6063-T831
Depth	44,45 mm (1,75")
Blade thickness	3,18 mm (0,125")
Frame thickness	3 mm (0,118")
Tube diameter	9,53 mm (0,375")
Space between blades	8,82 mm (0,347")
Blade spacing	12 mm (0,472")
Finish	Mill finish
Percentage of free area	67,27 %
Approximate weight	4,40 lbs/sq.ft.

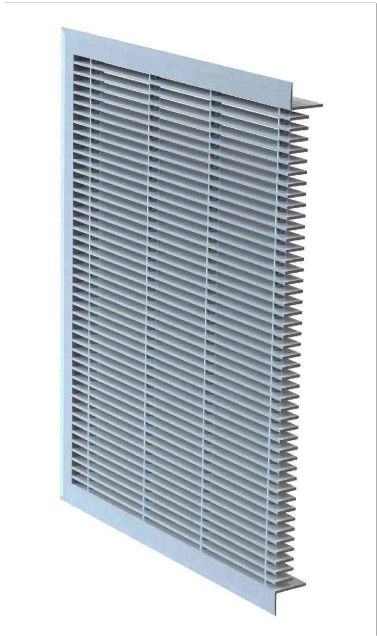


Elevation
(Outside view)

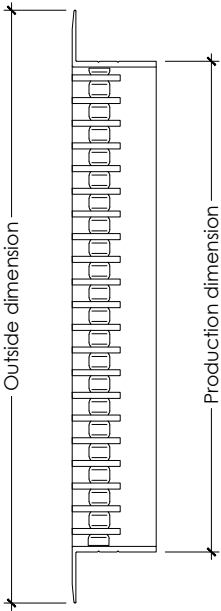

Side section

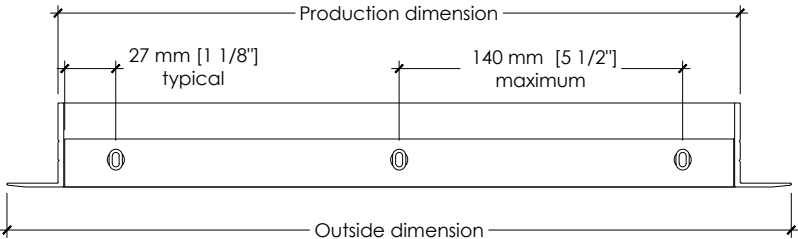

top section

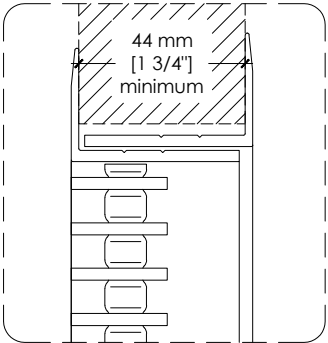

Detail
Auxiliary frame (option)

Outside dimensions
Opening dimensions
Production dimensions

Table with 6 columns: Item, Qty, Dimensions (Width 'A', Height 'B'), Number of sections (Wide, High), Clearance (6 mm (1/4") minimum recommended), and Notes.


Available finish

- Mill
- Anodized clear 10 microns
- Anodized clear 18 microns
- Anodized light bronze
- Anodized architectural bronze
- Anodized champagne
- Anodized black
- Acrylic polyurethane coating*
- Liquid super durable coating*
- Duranar baked enamel*
- Duranar XL baked enamel*
- Powder coating*

Color :
* Painted on surfaces visible from the outside only

Birdscreens and accessories

- Galvanized steel (standard)
- Expanded aluminum
- Woven aluminum
- Stainless steel
- Aluminum mosquito net
- Fiberglass mosquito net
- Permanent filter
- Auxiliary frame (option)
- Others :

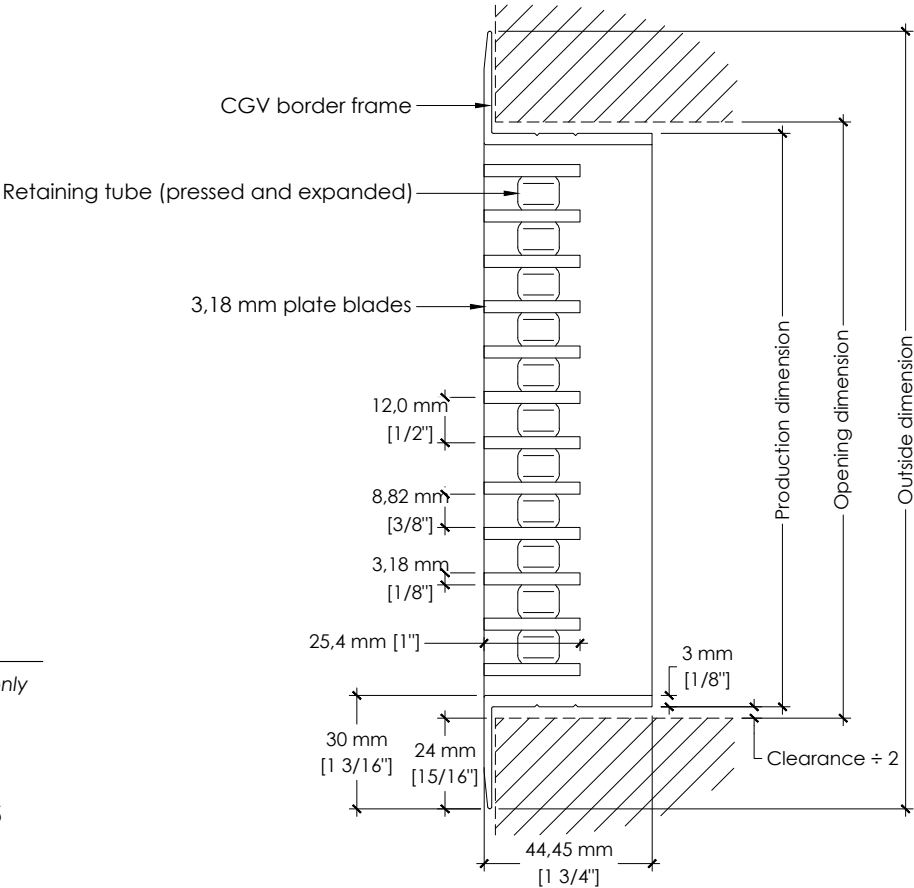

Project

Name :
Arch./Eng.:
Contractor :
OF / # PO :
Date :