
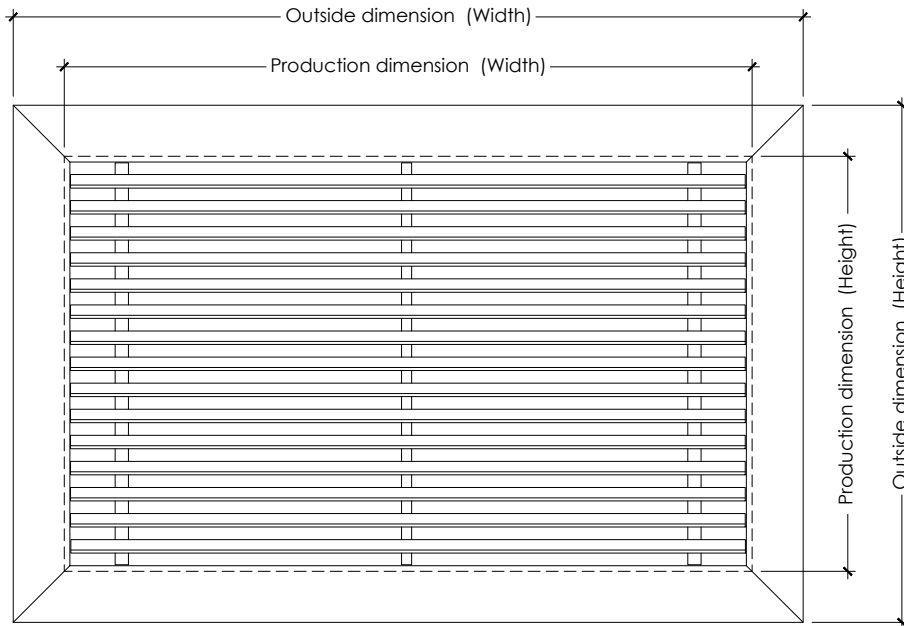



Standard specifications

Blade material	Aluminum 6061-T6
Frame material	Aluminum 6063-T5
Tube material	Aluminum 6063-T831
Depth	44,45 mm (1,75")
Blade thickness	2,00 mm (0,079")
Frame thickness	3,00 mm (0,118")
Tube diameter	9,53 mm (0,375")
Space between blades	9,96 mm (0,392")
Blade spacing	13,80 mm (0,543")
Finish	Mill finish
Percentage of free area	65,84 %
Approximate weight	4,06 lbs/sq.ft.

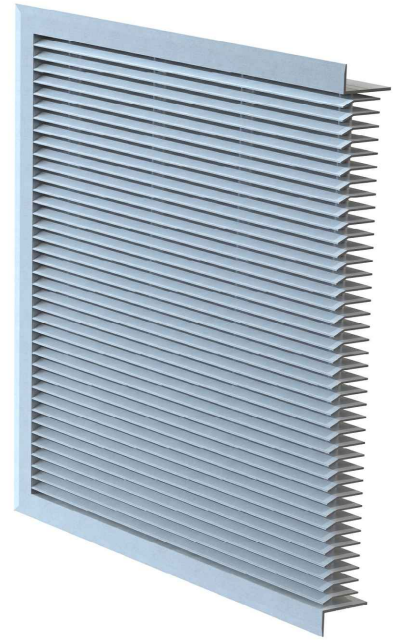


Elevation


(Outside view)

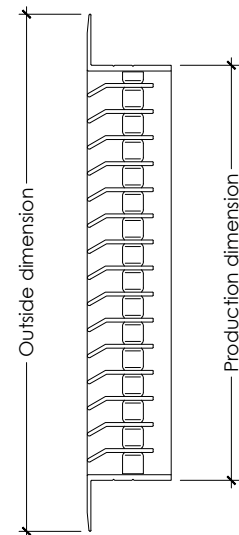

Side section

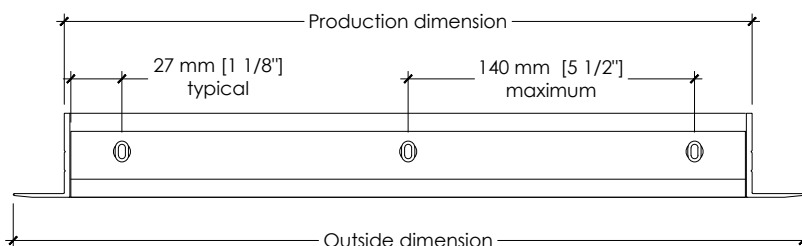

Top section



Detail

Auxiliary frame (option)

☐ Outside dimensions

☐ Opening dimensions

☐ Production dimensions

Item	Qty	Dimensions		Number of sections		Clearance (6 mm (1/4") minimum recommended)	Notes
		Width "A"	Height "B"	Wide	High		

Available finish


- ☐ Mill
- ☐ Anodized clear 10 microns
- ☐ Anodized clear 18 microns
- ☐ Anodized light bronze
- ☐ Anodized architectural bronze
- ☐ Anodized champagne
- ☐ Anodized black
- ☐ Acrylic polyurethane coating*
- ☐ Liquid super durable coating*
- ☐ Duranar baked enamel*
- ☐ Duranar XL baked enamel*
- ☐ Powder coating*

Color : _____

* Painted on surfaces visible from the outside only

Birdscreens and accessories

- ☐ Galvanized steel (standard)
- ☐ Expanded aluminum
- ☐ Woven aluminum
- ☐ Stainless steel
- ☐ Aluminum mosquito net
- ☐ Fiberglass mosquito net
- ☐ Permanent filter
- ☐ Auxiliary frame (option)
- ☐ Others : _____

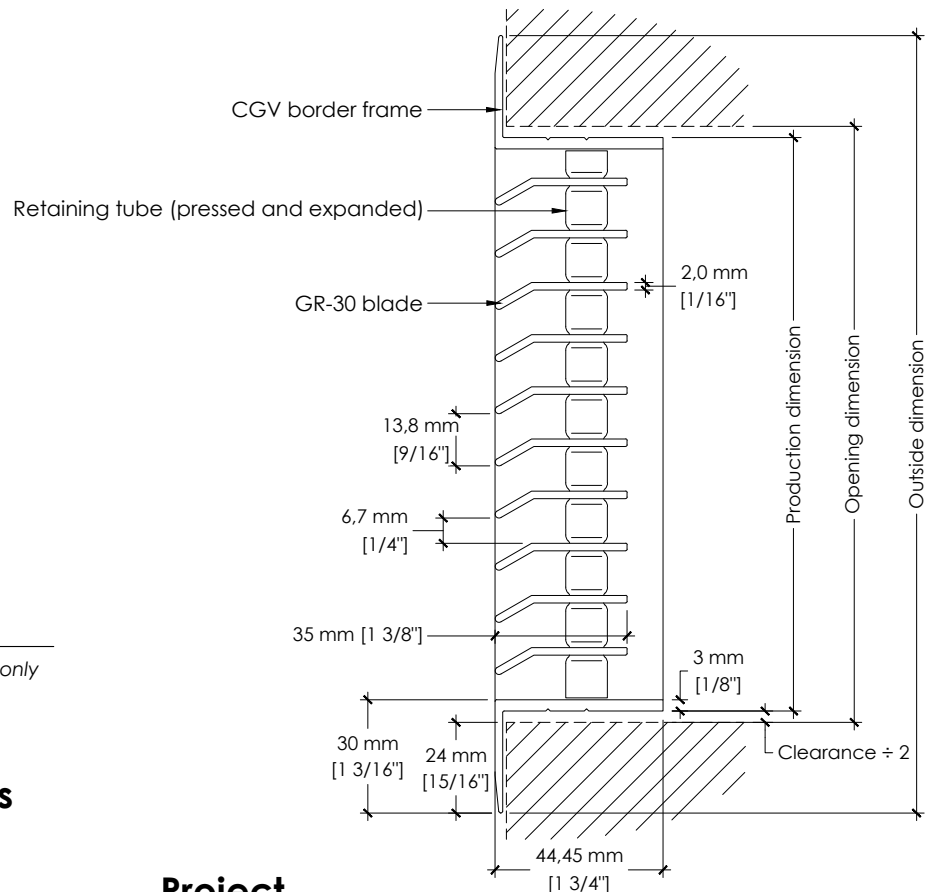

Project

Name : _____

Arch./Eng.: _____

Contractor : _____

OF / # PO : _____

Date : _____