

Performance Ratings*

Performance of 48 in. x 48 in. (1219 x 1219 mm) Louver

Percentage of free area 37,96 %

Free area 6,07 sq.ft. (0,564 m²)

Water penetration
@ 0,010 oz/sq.ft.(3,05 gr/m²) = 778,8 fpm (3,956 m/s)

Free area intake velocity
@ **Pressure** drop 0,15 in. H₂O
(3,81 mm H₂O) = 994 fpm (5,05 m/s)

*performance ratings excluded bird screen and other accessories.

Standard specifications

Material	Aluminum 6063-T5
Depth	101,6 mm (4")
Blade thickness	1,85 mm (0,07")
"L" frame thickness	2,06 mm (0,081")
"U" frame thickness	1,83 mm (0,072")
Blades angle	45°
Center to center	127,0 mm (5")
Birdscreen	Galvanized steel
Finish	Mill finish
Assembly	Mechanical
Hardware	Galvanized steel
Approximate weight	2,53 lbs/sq.ft.
Minimum Size	150 mm W x 305 mm H (6" W x 12" L)

Maximum Single Unlimited**
Section Size **The louver will be divided into sections, each with maximum size of 70 ft² (6.5 sq. m) to facilitate handling (width or height should not exceed 14 ft).



Free area chart (sq.ft. & m²)

po	12	18	24	30	36	42	48	54	60	66	72
m	0,30	0,46	0,61	0,76	0,91	1,07	1,22	1,37	1,52	1,68	1,83
12	0,19	0,30	0,42	0,53	0,65	0,76	0,87	0,96	1,07	1,19	1,30
0,30	0,018	0,028	0,039	0,049	0,060	0,071	0,081	0,089	0,100	0,110	0,121
18	0,31	0,50	0,69	0,88	1,06	1,25	1,44	1,58	1,77	1,96	2,15
0,46	0,029	0,047	0,064	0,081	0,099	0,116	0,134	0,147	0,164	0,182	0,199
24	0,54	0,86	1,19	1,51	1,83	2,16	2,48	2,72	3,05	3,37	3,69
0,61	0,050	0,080	0,110	0,140	0,170	0,200	0,230	0,253	0,283	0,313	0,343
30	0,77	1,23	1,70	2,16	2,62	3,09	3,55	3,89	4,36	4,82	5,28
0,76	0,072	0,115	0,158	0,201	0,244	0,287	0,330	0,362	0,405	0,448	0,491
36	0,99	1,58	2,17	2,77	3,36	3,95	4,55	4,99	5,58	6,18	6,77
0,91	0,092	0,147	0,202	0,257	0,312	0,367	0,422	0,464	0,519	0,574	0,629
42	1,08	1,73	2,37	3,02	3,67	4,32	4,97	5,45	6,10	6,75	7,39
1,07	0,100	0,160	0,221	0,281	0,341	0,401	0,461	0,506	0,567	0,627	0,687
48	1,29	2,06	2,84	3,61	4,39	5,16	6,07	6,51	7,29	8,06	8,84
1,22	0,120	0,192	0,264	0,336	0,407	0,479	0,564	0,605	0,677	0,749	0,821
54	1,52	2,43	3,34	4,24	5,15	6,06	6,97	7,66	8,57	9,47	10,38
1,37	0,141	0,225	0,310	0,394	0,479	0,563	0,648	0,711	0,796	0,880	0,965
60	1,75	2,80	3,85	4,89	5,94	6,99	8,04	8,83	9,88	10,93	11,97
1,52	0,162	0,260	0,357	0,455	0,552	0,650	0,747	0,820	0,918	1,015	1,112
66	1,97	3,14	4,32	5,50	6,68	7,86	9,04	9,92	11,10	12,28	13,46
1,68	0,183	0,292	0,402	0,511	0,621	0,730	0,840	0,922	1,032	1,141	1,251
72	2,06	3,30	4,53	5,77	7,00	8,24	9,47	10,40	11,64	12,87	14,11
1,83	0,191	0,306	0,421	0,536	0,651	0,765	0,880	0,966	1,081	1,196	1,311
78	2,27	3,63	5,00	6,36	7,72	9,08	10,45	11,47	12,83	14,19	15,55
1,98	0,211	0,338	0,464	0,591	0,717	0,844	0,970	1,065	1,192	1,319	1,445
84	2,49	3,98	5,48	6,97	8,47	9,96	11,46	12,58	14,07	15,57	17,06
2,13	0,231	0,370	0,509	0,648	0,787	0,925	1,064	1,168	1,307	1,446	1,585

Louver height

Louver width




Cometal factory based
in Lévis, province
of Quebec



Basic warranty for
mill finish louver

Water Penetration

Test Size 48 in. x 48 in. (1219 mm x 1219 mm) Test duration of 15 minutes

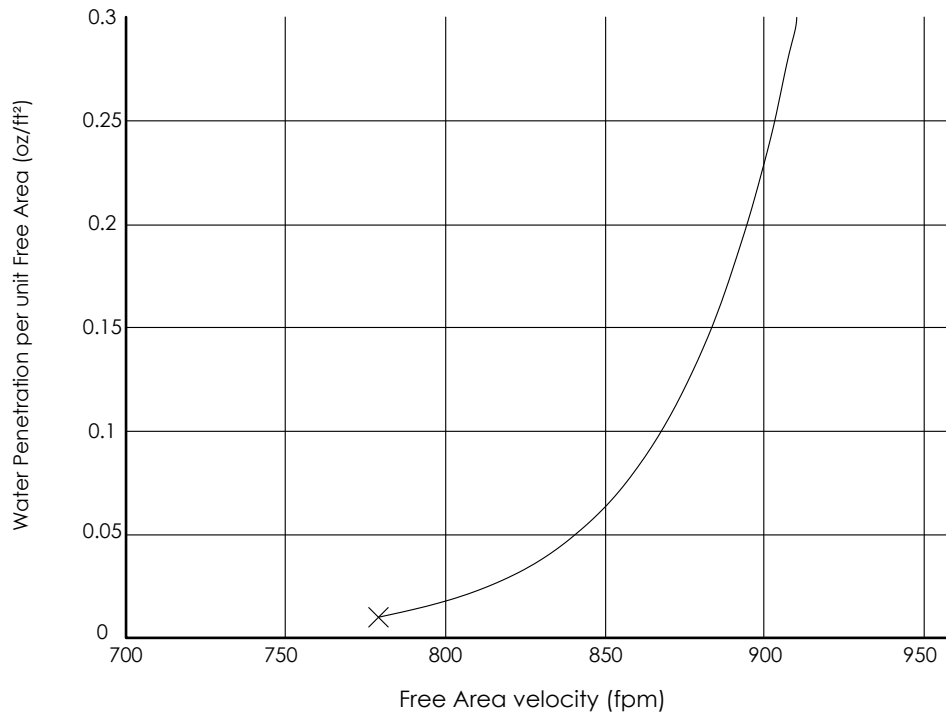


— Water Penetration per Free Area X Beginning of Water Penetration

The AMCA Water Penetration Test provides a method for comparing various louver models and designs as to their efficiency in resisting the penetration of rainfall under specific laboratory test conditions. The beginning point of water penetration is defined as that velocity where the water penetration defined as that velocity where the water penetration curve projects through 0.01 oz (3 g) of water (penetration) per sq. ft. (m²) of louver area. ** The beginning point of water penetration for model 204-45 is 778,8 fpm free area velocity. These performance ratings do not guarantee a louver to be waterproof or stormproof and should be used in combination with other factors including good engineering judgement in selecting louver model.

Pressure drop

Test Size 48 in. x 48 in. (1219 mm x 1219 mm)

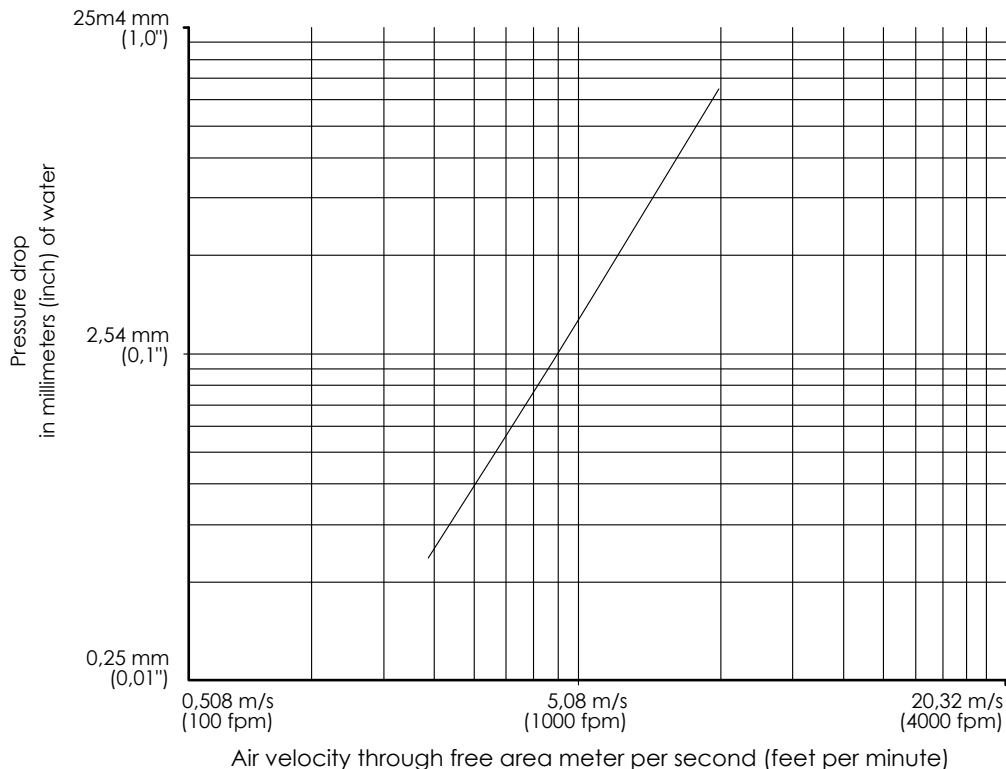

The resistance to airflow (pressure drop) varies depending on louver application (air intake ou air exhaust). Free area velocities (shown) are higher than average velocity through the overall louver size.

CERTIFICATION AMCA



Cometal inc. certifies that the 204-45 louvers shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to Water Penetration and Air ratings. Louver were tested in accordance with AMCA Standard 500-L.

Specifications

Material	Aluminum 6063-T5
Blades	Thickness 1,85 mm (0,073")
L frame	Thickness 2,06 mm (0,081")
U frame	Thickness 1,83 mm (0,072")

Available frames

- ☐ "L" frame
- ☐ "U" frame
- ☐ Concealed mullion (continuous blades)
- ☐ Exposed mullions (nested frames)

Available finish

- ☐ Mill
- ☐ Anodized clear 10 microns
- ☐ Anodized clear 18 microns
- ☐ Anodized light bronze
- ☐ Anodized architectural bronze
- ☐ Anodized champagne
- ☐ Anodized black
- ☐ Acrylic polyurethane coating*
- ☐ Liquid super durable coating *
- ☐ Duranar baked enamel *
- ☐ Duranar XL baked enamel*
- ☐ Powder coating *

Color : _____

* Painted on surfaces visible from the outside only




Birdscreens and accessories

- ☐ Galvanized steel (standard)
- ☐ Expanded aluminum
- ☐ Woven aluminum
- ☐ Stainless steel
- ☐ Aluminum mosquito net
- ☐ Fiberglass mosquito net
- ☐ Permanent filter
- ☐ Birdscreen frame
- ☐ Non-insulated obturating panel 0,8 mm [0,032"]
- ☐ Insulated obturating panel 50 mm [2"]

Finish : _____

Color : _____

☐ Others : _____

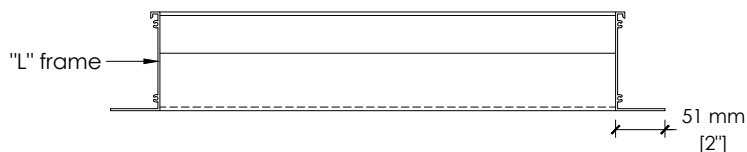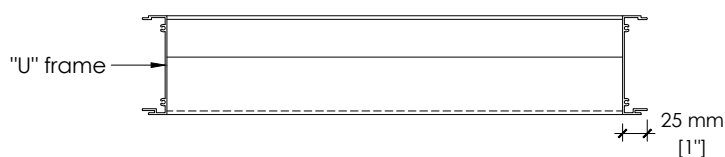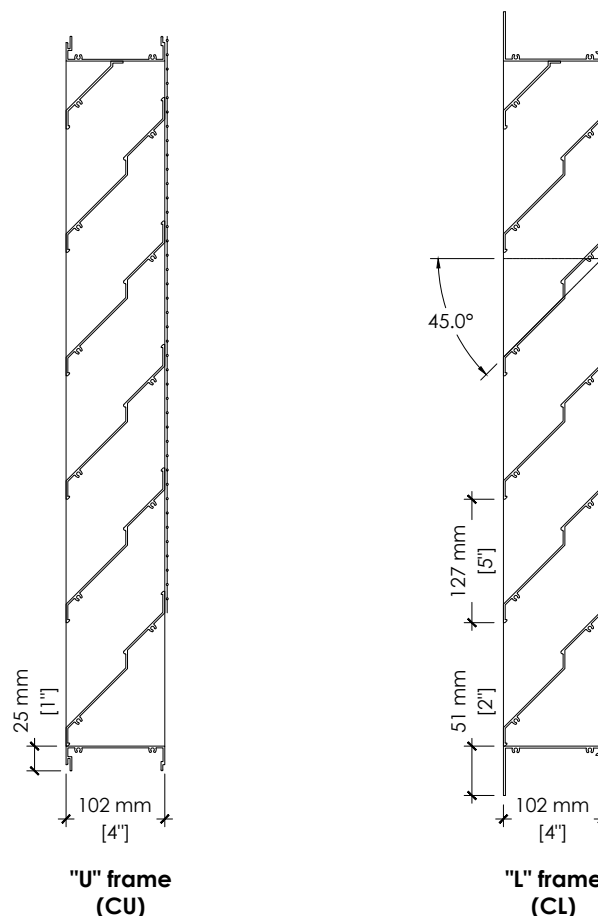

Project

Name : _____

Arch./Eng.: _____


Contractor : _____

OF / # PO : _____


Date : _____

Élévation

(vue de l'extérieur)

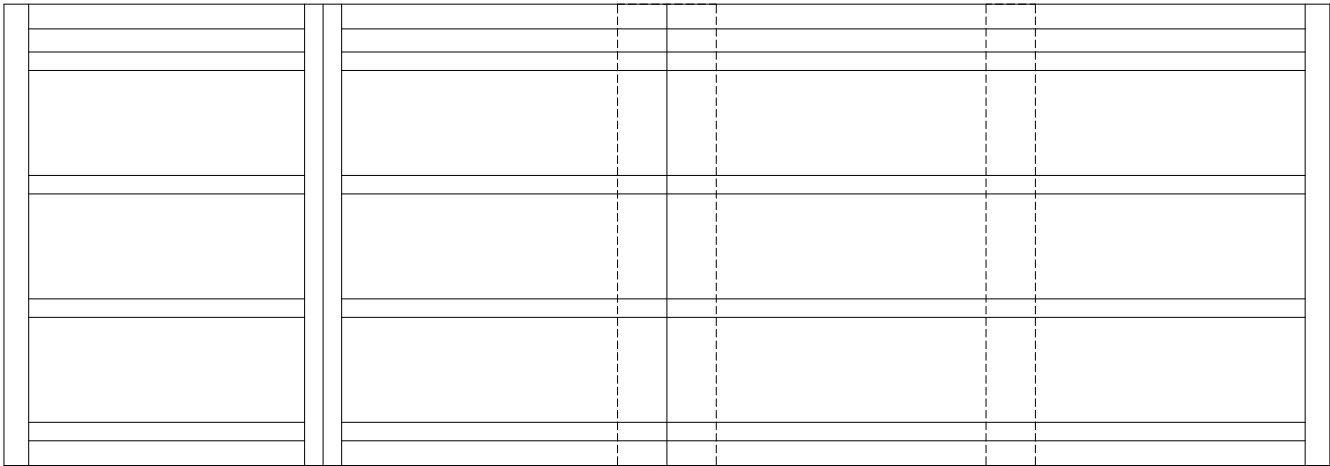


Coupe

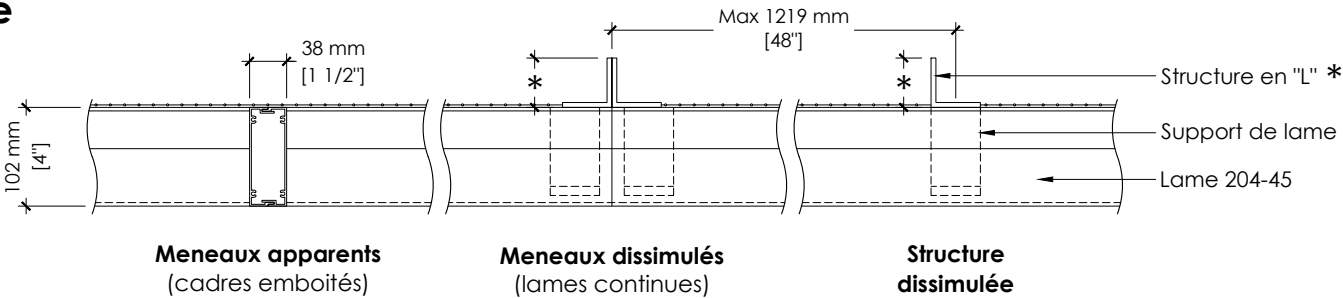

Structure de la persienne


Pour les persiennes de plus de 1219 mm (48\") de largeur, il est nécessaire de mettre une structure à l'arrière de la persienne

		* Dimensions de la structure de la persienne
Hauteur de la persienne	moins de 2438 mm (96\")	Angle de 38 x 38 x 4,7 mm (1 1/2\" x 1 1/2\" x 3/16\")
	de 2438 mm (96\") à 3658 mm (144\")	Angle de 51 x 51 x 4,7 mm (2\" x 2\" x 3/16\")
	plus de 3658 mm (144\")	veuillez communiquer avec le département d'ingénierie

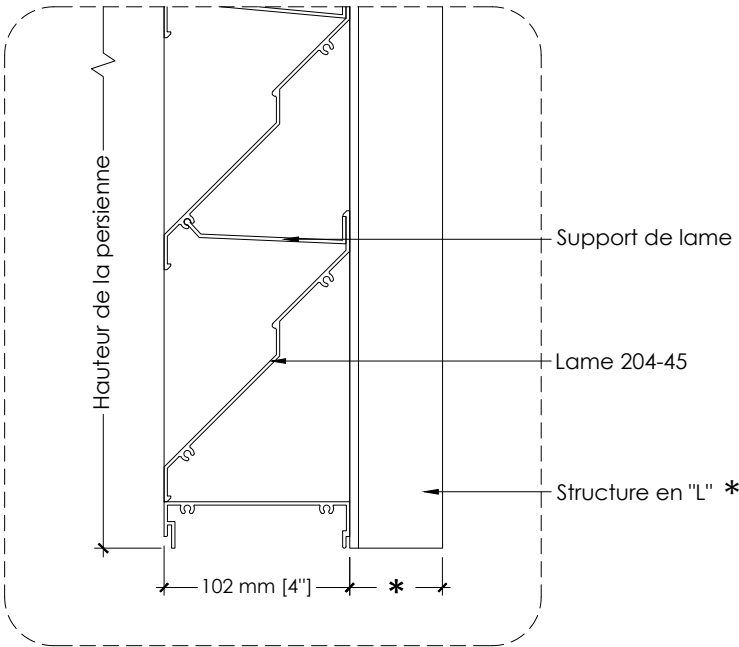


Shapes


☐ Rectangle / square




☐ Triangle




☐ Left triangle






☐ Right triangle




☐ Round



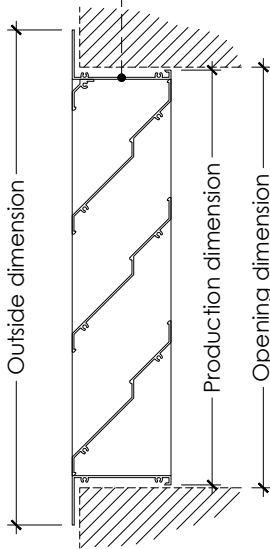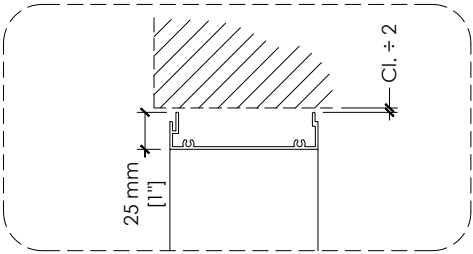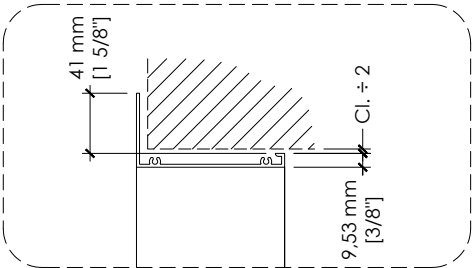

"L" frame (CL)

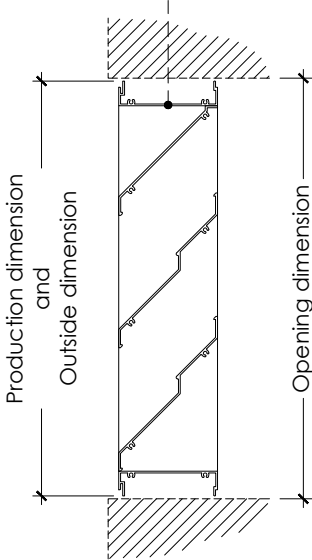

"U" frame (CU)

- ☐ Outside dimensions
- ☐ Opening dimensions
- ☐ Production dimensions

Item	Qty	Dimensions		Number of sections		Clearance (6 mm (1/4") minimum recommended)	Notes
		Width "A"	Height "B"	wide	High		